
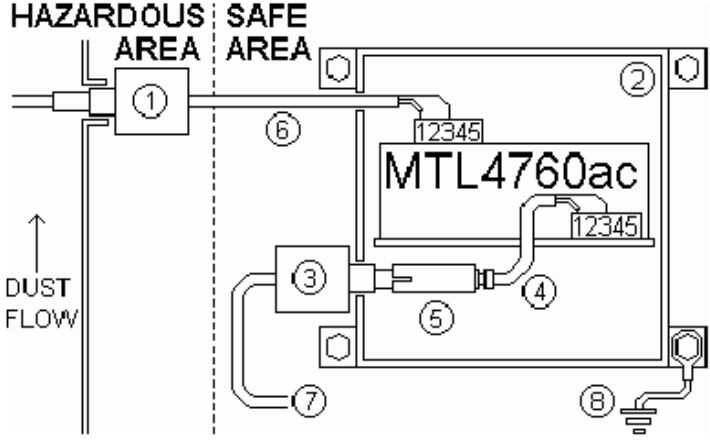


技术说明书	IS BARRIER	
防爆隔离装置		

防爆隔离装置安装方法：



危险区域 || 安全区域

所有 GOYEN 公司监测系统电子产品（包括 EMS6，EMP5，BBD5 探头和 RLP5 料位计）均可以用防爆隔离装置安装于危险场所。除了探头本体（图中 3 号）之外，需要以下附加配件：

型号：

P2 - 45700：包括图中的 MTL4760ac 防爆隔离盒（图中 2 号）和探头接线夹（图中 5 号）与连接线（图中 4 号）。

P2 - 46200：包括图中的无电源探头（图中 1 号）。

P2 - 46300：包括图中的无电源信号连接线（图中 6 号），按照现场实际需要以每米价格提供，客户需要确定现场距离探头安装点的安全距离范围。一般是探头安装点到最接近的电源供电位置。

MTL4760ac 防爆隔离装置的安全等级公布如下：

Region (Authority)	Australia (SA)	Canada (CSA)	CIS (VNIIVE)	(CENELEC)		USA (FM)
				UK (BASEEFA) Apparatus	UK (BASEEFA) Systems	
Standard	AS2380.7	C22.2 No.157	EN 50020 GOST 22782-5-78	EN 50014 & EN 50020 BS 5501: Pts. 1&7 1977	EN 50039 BS 5501: Pt.9 1982	3610 Entity
Approved for	[Ex ia] IIC	Class I, II, III	Ex ia/ib IIC	[EEx ia] IIC	EEx ia IIC T4 or T6	Class I, II, III Div.1,2, Gps A-G. Units can also be sited in Class I,II,III Div.2 in suitable enclosures
Model No. (MTL)	File No.	File No.	Certificate No.	Certificate No.	Certificate No.	File No.
MTL4706+	Ex2180X	LR36637-70	D.94C.015	Ex93C2446	Ex93C2447	J.I.2X3A9.AX
MTL4715+	Pending	LR36637-70		Ex93C2300	Ex93C2434	J.I.1Y5A5.AX
MTL4722+	Pending	LR36637-81		Ex93C2300	Ex93C2434	J.I.1Y5A5.AX
MTL4728+	Ex2180X	LR36637-70	D.94C.016	Ex93C2300	Ex93C2434	J.I.2X3A9.AX
MTL4728-	Ex2180X	LR36637-70		Ex93C2300	Ex93C2434	J.I.2X3A9.AX
MTL4755ac	Ex2180X	LR36637-70	D.94C.017	Ex93C2300	Ex93C2434	J.I.2X3A9.AX
MTL4760ac	Ex2180X	LR36637-70	D.94C.018	Ex93C2300	Ex93C2434	J.I.2X3A9.AX

详细配置请联系澳大利亚高原控制有限公司上海代表处。

澳大利亚高原控制有限公司上海代表处

上海市江苏路369号兆丰世贸大厦2521室 200050

GOYEN CONTROLS CO. PTY. LTD. • ABN 60000168098 www.cleanairsystems.com

2521 Zhao Feng World Trade Building • 369 Jiang Su Rd. • Shanghai • 200050 • China Fax 传真 8621 5239 8812

REPRESENTED IN • AUSTRALIA • NEW ZEALAND • NORTH EAST ASIA • SOUTH EAST ASIA • USA • EUROPE

