




Emflux 2020
Electromagnetic Flowmeter

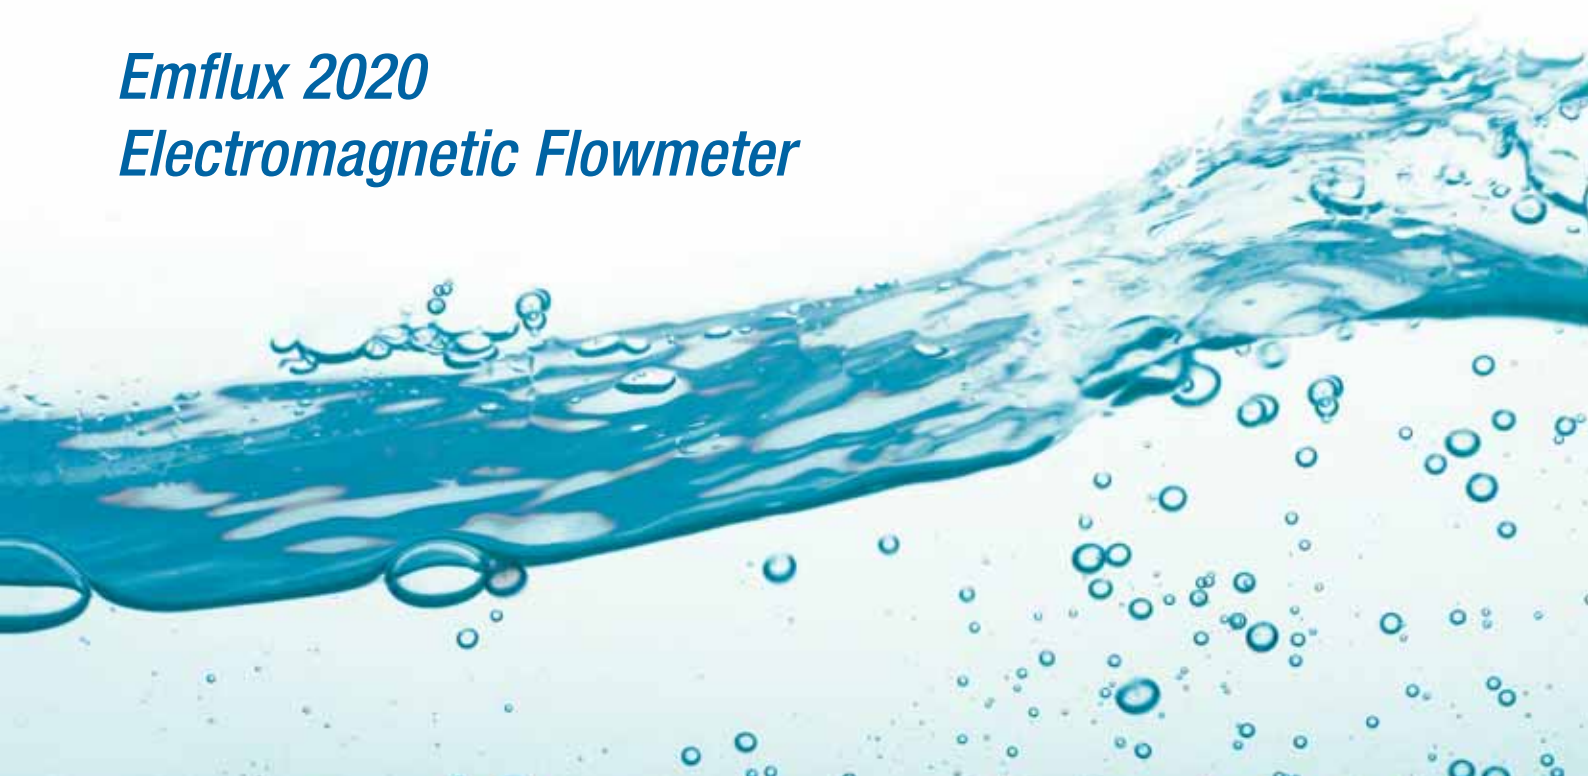

The 2020 flow detector used with either our M300 or I300 flow transmitters are ideally suited to accurately measure the flowrate of a wide variety of conductive process liquids, water, wastewater and similar applications.

Features

- The Emflux flow detector uses the well proven electromagnetic method of measurement, which applies Faraday's Law as the principle of operation.
- ABS tube and housing.
- High accuracy.
- No moving parts.
- Wide operating range.
- No obstruction to the flow.
- Little to no pressure loss.
- A choice of electrodes to suit the process.
- Variety of flange types available.
- Robust construction.
- Submersible to 1.5 metres (5 feet) of water.
- Suitable for buried service.
- Minimal straight pipe requirements.
- Remotely mounted electronics.
- On powered sites used with the M300 transmitter which features multiple outputs and flexible programming.
- On non-powered sites used with the I300 battery powered transmitter with solar recharge.



I300 Solar Powered Transmitter

General Applications

- Irrigation flow measurement.
- Water production and distribution.
- Effluent discharge.
- Selected chemical applications.

Technical Data and Specifications

Accuracy	M300	I300
Display and Outputs	0.2% of rate or 1 mm/sec (0.04in/sec) whichever is greater	1% of rate or 2mm/sec (0.08in/sec) whichever is greater
Velocity Range:	0.01 to 10.0 m/sec (0.03 to 33 ft/sec)	<0.03 to >5.0 m/sec (<0.1 to >16.4 ft/sec)
Turndown from Full Scale:	>1000:1	>166:1
Pressure Effects:	Negligible effect	Negligible Effect
Repeatability:	< 0.05%	< 0.1%
Power Supply Variations:	Negligible	Negligible

Note: Under reference conditions


Specifications	
Sizes	50mm - 300mm
Metering Tube	ABS Plastic
Electrodes	316 S/S as standard Hastelloy 'C' Specials available on request
Earthing	Ground Electrodes 316 S/S fitted as standard Other ground electrode materials available
Process Flange Connections	Slip-ring galvanised fittings, optional stainless steel AS2129 D/E, ANSI 150 Spigot and gibbault connections Others available on request
Pressure Limitations	50mm (2 in) = 1500 kPa at 20°C (68°F) 80mm (3.2 in) = 900 kPa at 20°C (68°F) 100-200mm (4 in-8 in) = 900 kPa at 20°C (68°F) 250mm (10 in) = 1500 kPa at 20°C (68°F) 300mm (12 in) = 900 kPa at 20°C (68°F)
Temperature Limitations	60°C (140°F) maximum
Environmental Protection	IP68 or Nema 4 to 1.5 metres (5 feet)
Housing	Composite Material, ABS

Dimensions

in mm and (inches)

Nominal Bore ØA	B	K	D	C	Min Flow Range M300 & I300 l/sec (gal/min)	Max Full Scale M300 l/sec (gal/min)	Max Full Scale I300 l/sec (gal/min)
50 (2)	240 (9.45)	100 (3.94)	360 (14.17)	130 (5.12)	0-1.0 (0-15.5)	20 (317)	10 (158)
80 (3)	240 (9.45)	100 (3.94)	400 (15.75)	130 (5.12)	0-2.5 (0-39.6)	50 (792)	25 (396)
100 (4)	260 (10.24)	105 (4.13)	420 (16.54)	145 (5.71)	0-4.0 (0-63.4)	78 (1,236)	40 (634)
150 (6)	325 (12.80)	135 (5.31)	520 (20.47)	175 (6.89)	0- 8.9 (0-141.0)	176 (2,790)	88 (1,393)
200 (8)	364 (14.33)	152 (5.98)	610 (24.02)	201 (7.91)	0-15.7 (0-248.9)	314 (4,977)	157 (2,486)
250 (10)	417 (16.42)	179 (7.05)	750 (29.52)	228 (8.98)	0-24.5 (0-388.3)	491 (7,782)	245 (3,883)
300 (12)	456 (17.95)	199 (7.83)	818 (32.20)	251 (9.88)	0-35.3 (0-559.5)	707 (11,206)	353 (5,595)

Note: Dimensions are nominal to ± 2mm (or ± 0.08 in), gal = US gallon

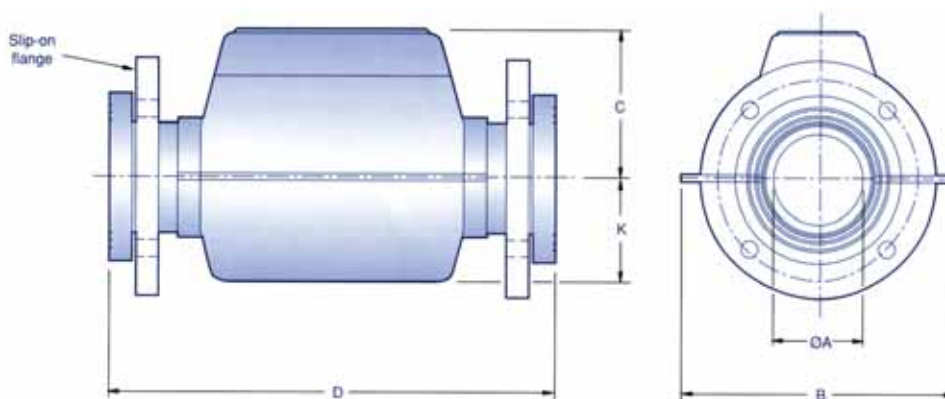

Note: Above dimensions are based on flanged style meters. For meters with spigot ends, the length is reduced. See the table below.

ØA	Per spigot	For spigot on each end
50	3mm (0.12in)	6mm (0.24in)
80	5mm (0.19in)	10mm (0.38in)
100	5mm (0.19in)	10mm (0.38in)
150	8mm (0.31in)	16mm (0.62in)
200	6mm (0.24in)	12mm (0.48in)
250	60mm (2.36in)	120mm (4.72in)
300	60mm (2.36in)	120mm (4.72in)

Installation Requirements

Detector

Mounts directly into the process pipeline and can be installed in horizontal, vertical or sloped pipelines. The preferred axis of the detector measuring electrodes is horizontal.

Note: For accurate flow measurement the flow detector must always be full.

Associated Flow Transmitter

Can be located remotely from the detector. Model M300 up to 100 metres. Model I300 up to 30 metres.

Typical specifying sequence

Example EM2020 - 080 AD AD S X

Used with Transmitter

IR2020 = for use with I300
EM2020 = for use with M300

Size mm (in)

050 (2)
080 (3.5)
100 (4)
150 (6)
200 (8)
250 (10)
300 (12)

Process Connection - Upstream

AD = AS2129 flange (Table 'D') (Std)
AE = AS2129 flange (Table 'E')
C1 = ANSI 150 flange
SE = Spigot End
ZZ = Special (detail in text)

Process Connection - Downstream

As above

Electrode Material

S = Stainless 316 (Std)
H = Hastelloy 'C'
Z = Special (detail in text)

Pipe not full Electrode

X = None
S = Stainless 316 (Std)
H = Hastelloy 'C'
K = Special (detail in text)



Australia

Head Office
Goyen Controls Co Pty Ltd
268 Milperra Road
Milperra, NSW 2214

Telephone: 1800 805 372
Facsimile: 1300 658 799

Sales and Service
Queensland, South Australia
Victoria, Western Australia

Telephone: 1800 805 372
Facsimile: 1300 658 799

USA

Goyen Valve Corporation
1195 Airport Road
Lakewood
New Jersey 08701, USA

Telephone: 1 732 364 7800
Facsimile: 1 732 364 1356

Asia

Goyen Controls Co Pty Ltd
Shanghai Representative Office
1209 Greenland Business Centre
1258 Yu Yuan Road
Shanghai PC200050, CHINA

Telephone: 86 21 5239 8810
Facsimile: 86 21 5239 8812

Goyen Controls Co Pty Ltd
73-M Jalan Mega Mendung
Kompleks Bandar OUG
58200 Kuala Lumpur, MALAYSIA

Telephone: 60 37 987 6839
Facsimile: 60 37 987 7839

Greenspan Singapore Pte Ltd
02-01, Minwa Industrial Building
39 Genting Lane
Singapore 349554

Telephone: 65 6748 0140
Facsimile: 65 6748 2534

Europe

Goyen Controls Co UK Ltd
Unit 3B Beechwood
Chineham Business Park
Basingstoke, Hampshire, RG24 8WA
UNITED KINGDOM

Telephone: 44 1256 817 800
Facsimile: 44 1256 843 164

Tyco Umwelttechnik GmbH
Im Petersfeld 6
D-65624 Altendiez
GERMANY

Telephone: 49 6432 1001/1002
Facsimile: 49 6432 63810

Mecair S.r.l.
Via per Cinisello 97
20054 Nova Milanese
Milano,
ITALY

Telephone: 39 362 375 118
Facsimile: 39 362 375 124